

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 130 786 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
05.09.2001 Bulletin 2001/36

(51) Int Cl.7: H03M 3/02

(21) Application number: 01400412.1

(22) Date of filing: 16.02.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Tagami, Shigeo, c/o Sony Corporation
Shinagawa-ku, Tokyo (JP)

(74) Representative: Thévenet, Jean-Bruno et al
Cabinet Beau de Loménie
158, rue de l'Université
75340 Paris Cédex 07 (FR)

(30) Priority: 18.02.2000 JP 2000046838

(71) Applicant: SONY CORPORATION
Tokyo (JP)

(54) A digital signal processing device and a method and a delta-sigma modulator using the same method

(57) A signal processing device uses a $\Delta\Sigma$ modulator (13) having varying effective orders to ensure an S/N ratio by selecting a high order when a 1-bit music signal is output via the $\Delta\Sigma$ modulator (13). The signal processing device prevents a noise during switchover by shifting to a low order just before the $\Delta\Sigma$ modulator

(13) is bypassed if this occurs. The present invention provides a digital signal processing device which can switch between an original sound signal and a $\Delta\Sigma$ modulation signal, and yield a sufficient S/N ratio for a re-processed $\Delta\Sigma$ modulation signal. If any 1-bit original sound signal is input, little switching noise is generated.

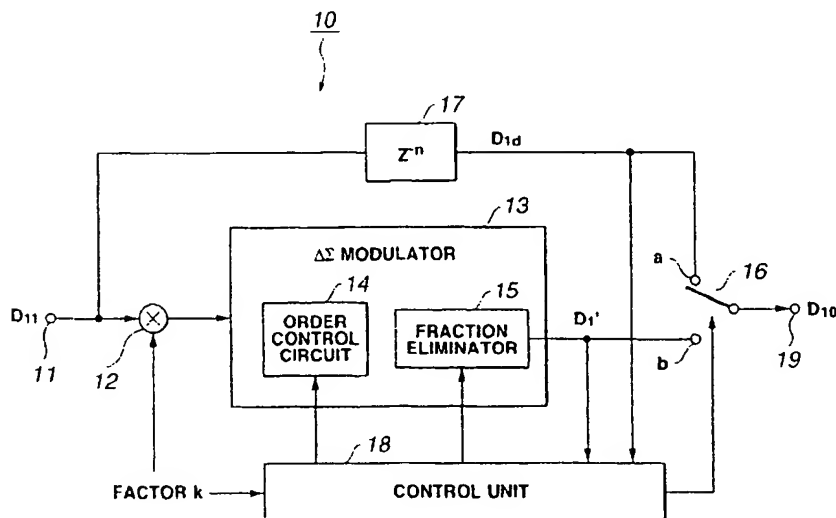


FIG.3

EP 1 130 786 A2

Description

BACKGROUND OF THE INVENTION

- 5 [0001] The present invention relates to a digital signal processing device, a method, and a $\Delta\Sigma$ modulator for applying edit processing such as volume adjustment and the like to digital audio data using high-speed 1-bit data.
- [0002] A method called the delta-sigma ($\Delta\Sigma$) modulation is proposed to digitize voice signals.¹ (1: Yamazaki, Yoshio, "AD/DA Converter and Digital Filter," Journal of the Acoustical Society of Japan 46, No. 3 (1990): pp. 251-257.)
- 10 [0003] FIG. 1 is a block diagram of a $\Delta\Sigma$ modulation circuit for applying $\Delta\Sigma$ modulation to, say, 1-bit digital data. In FIG. 1, an input audio signal S is supplied from an input terminal 81 to an integrator 83 via an adder 82. This signal from the integrator 83 is supplied to a comparator 84. The signal is compared to a mid-point potential of, say, the input audio signal S and is quantized on a 1-bit basis every sampling period. A frequency for the sampling period (sampling frequency) is 64 or 128 times the conventional frequency 48 kHz or 44.1 kHz.
- 15 [0004] This quantized data is supplied to a 1-sample delay circuit 85 and is delayed for one sampling period. This delay data is converted to an analog signal in, say, a 1-bit D/A converter 86, is added to the adder 82, and is added to the input audio signal S from the input terminal 81. The quantized data output from the comparator 84 is generated as 1-bit data D1 from an output terminal 87. According to $\Delta\Sigma$ modulation processing of this $\Delta\Sigma$ modulation circuit, as described in the above-mentioned document, it is possible to generate audio signals with a high dynamic range using the small number of bits such as 1 bit by sufficiently increasing a sampling frequency. It is also possible to provide a
- 20 wide transmittable frequency band. The $\Delta\Sigma$ modulation circuit is suited for circuit configuration integration and can relatively easily provide A/D conversion accuracy. The $\Delta\Sigma$ modulation circuit is widely used in an A/D converter, for example. A simple analog low-pass filter can be used for restoring the $\Delta\Sigma$ -modulated signal to an analog audio signal. By using these features, the $\Delta\Sigma$ modulation circuit can be applied to recorders and data transmission for handling high-quality data.
- 25 [0005] The above-mentioned $\Delta\Sigma$ modulation circuit thus generates 1-bit data for music data. In order to edit such music data using a high-speed 1-bit system, the following operation is needed as disclosed in Japanese Patent Application Laid-Open Publication No. 9-307452 submitted by the applicant of the present invention. In a 1-bit data editing unit 90 as shown in FIG. 2, 1-bit input data D1i is input as music data from an input terminal 91. In a multiplier 92, D1i is multiplied by a specified factor k to temporarily convert to multi-bit data Dm. This data is again $\Delta\Sigma$ -modulated in a
- 30 $\Delta\Sigma$ modulator 93 to be restored to 1-bit signal D1'. The $\Delta\Sigma$ modulator 93 is a multistage modulator in a plurality of orders using a plurality of integrators and has a more complicated configuration than for the $\Delta\Sigma$ modulation circuit in FIG. 1.
- [0006] However, the above-mentioned configuration always lets signals pass the $\Delta\Sigma$ modulator 93. Even if no volume adjustment or the like is needed, namely, the factor k is 1.0, music data D1i always passes the $\Delta\Sigma$ modulator 93, degrading sound quality. A fraction eliminator 94 is used for performing specified addition and subtraction to eliminate
- 35 a fraction remaining in an integrator inside the $\Delta\Sigma$ modulator 93. This operation approximates patterns for an original sound signal D1i and a $\Delta\Sigma$ modulation signal D1'. A delay circuit 96 is used to approximately align phases for the $\Delta\Sigma$ modulation signal D1' and the original sound signal D1i. A control unit 97 monitors signal patterns for the $\Delta\Sigma$ modulation signal D1' and the original sound signal D1i. When these patterns almost match, a selector 95 is switched to a side a for the delayed original sound signal D1d from a side b for the $\Delta\Sigma$ modulation signal D1'.
- 40 [0007] When no volume adjustment or the like is needed, this process can switch the $\Delta\Sigma$ modulation signal D1' over to the delayed original sound signal D1i and generate a 1-bit data output from an output terminal 95 without generating a switching noise or the like. This process can also bypass reprocessing in the $\Delta\Sigma$ modulator 93.
- [0008] However, a noise may be generated during this switching operation depending on specifications of the $\Delta\Sigma$ modulator 93 to be used and a frequency of the 1-bit data D1i to be input. Generally, a high-order $\Delta\Sigma$ modulator can
- 45 provide a high S/N ratio in an audible band. On the other hand, frequency characteristics change at a point near the audible band. A phase can easily rotate at a high frequency. When high-order $\Delta\Sigma$ modulation is used and an input signal frequency is high, a level difference and a phase shift occur between the delayed original sound signal D1i and the $\Delta\Sigma$ modulation signal D1'. A noise occurs when the selector 95 switches between these signals.
- [0009] When the low-order $\Delta\Sigma$ modulator 93 is used, it hardly generates a noise during switchover because of little
- 50 level difference and phase rotation. On the other hand, the audible band causes a low S/N ratio, lowering the S/N ratio when the $\Delta\Sigma$ modulator 93 is not bypassed.

BRIEF SUMMARY OF THE INVENTION

- 55 [0010] The present invention has been made in consideration of the foregoing. It is therefore an object of the present invention to provide a digital signal processing device having a simple configuration, a method, and a $\Delta\Sigma$ modulator for switching between an original sound signal and a $\Delta\Sigma$ modulation signal and providing a sufficient S/N ratio for a reprocessed $\Delta\Sigma$ modulation signal with little switching noise generated after input of any 1-bit original sound signal.

[0011] For solving the above-mentioned problems, a digital signal processing device according to the present invention comprises: multiplication means for multiplying an input $\Delta\Sigma$ modulation signal generated from $\Delta\Sigma$ modulation by a factor; $\Delta\Sigma$ modulation means having a plurality of integrators for varying effective orders and applying $\Delta\Sigma$ modulation again to an output from the multiplication means; and switchover means for switching between a reprocessed $\Delta\Sigma$ modulation signal from the $\Delta\Sigma$ modulation means and the input $\Delta\Sigma$ modulation signal.

[0012] This digital signal processing device uses a $\Delta\Sigma$ modulator with variable effective orders by changing orders for $\Delta\Sigma$ modulation signal output and the original sound signal.

[0013] For solving the above-mentioned problems, a digital signal processing method according to the present invention comprises: a multiplication step for multiplying an input $\Delta\Sigma$ modulation signal generated from $\Delta\Sigma$ modulation by a specified factor for specified processing; a reprocessed $\Delta\Sigma$ modulation step for reapplying $\Delta\Sigma$ modulation to an output provided with said specified processing by using a $\Delta\Sigma$ modulator comprising a plurality of integrators for varying effective orders; and a switchover step for switching between said input $\Delta\Sigma$ modulation signal and said reprocessed $\Delta\Sigma$ modulation signal.

[0014] For solving the above-mentioned problems, a $\Delta\Sigma$ modulator according to the present invention for applying $\Delta\Sigma$ modulation to a multi-bit signal comprises: a plurality of integrators; and order variation means for varying effective orders increasing due to connection with a plurality of said integrators.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0015] FIG. 1 is a basic configuration diagram of a $\Delta\Sigma$ modulator for generating;

[0016] FIG. 2 is a block diagram showing a configuration of a conventional 1-bit data editing unit;

[0017] FIG. 3 is a block diagram showing a configuration of a 1-bit data editing unit according to an embodiment of the present invention;

[0018] FIG. 4 shows a detailed configuration of a $\Delta\Sigma$ modulator constituting the above-mentioned 1-bit data editing unit; and

[0019] FIG. 5 is a frequency characteristics diagram of the above-mentioned $\Delta\Sigma$ modulator.

DETAILED DESCRIPTION OF THE INVENTION

[0020] Embodiments of the present invention will be described in further detail with reference to the accompanying drawings. As shown in FIG. 3, this embodiment is a 1-bit data editing unit 10 which applies edit processing including fading such as fade-in and fade-out to music data D1i comprising 1-bit data resulting from $\Delta\Sigma$ modulation.

[0021] The 1-bit data editing unit 10 comprises a multiplier 12, a $\Delta\Sigma$ modulator 13, a delay circuit 17, a selector 16, and a control unit 18. The multiplier 12 multiplies input 1-bit data D1i by factor k. The input 1-bit data D1i is the above-mentioned music data to be input to an input terminal 11. The $\Delta\Sigma$ modulator 13 comprises, say, five integrators and re-applies $\Delta\Sigma$ modulation to a multiplied output from the multiplier 12 by varying effective orders as will be described later. The delay circuit 17 aligns a phase for the input 1-bit data D1i to the reprocessed $\Delta\Sigma$ modulation signal D1' from the $\Delta\Sigma$ modulator 13. The selector 16 switches between the delayed original sound signal D1d output from the delay circuit 17 and the reprocessed $\Delta\Sigma$ modulation signal D1i. The control unit 18 provides controls to vary the effective orders for the $\Delta\Sigma$ modulator 13.

[0022] As shown in FIG. 4, the $\Delta\Sigma$ modulator 13 is a 5-order (5-stage) $\Delta\Sigma$ modulator comprising five integrators 23, 33, 43, 50, and 57. As mentioned above, the $\Delta\Sigma$ modulator varies effective orders according to situations. This is to prevent a noise generated during switchover between an original sound signal and a $\Delta\Sigma$ modulation signal depending on specifications of the $\Delta\Sigma$ modulator to be used and frequencies of input 1-bit data.

[0023] Generally, as shown in FIG. 5, the 3-, 4-, and 5-order $\Delta\Sigma$ modulators provide higher S/N ratios as their orders increase. On the other hand, a point at which frequency characteristics change nears the audible band, causing a phase to easily rotate at a high frequency. The $\Delta\Sigma$ modulator 13 switches the reprocessed $\Delta\Sigma$ modulation signal over to the delayed original sound signal when the order becomes low enough to cause small level differences and phase rotations at the high frequency.

[0024] The following describes the configuration of the $\Delta\Sigma$ modulator 13 in detail. The $\Delta\Sigma$ modulator 13 is configured as $Z^{-1}/(1-Z^{-1})$. In this configuration, the first integrator 23 uses a delay circuit 26 to delay an addition output from an adder 27. The integrator 23 supplies this output to a fraction eliminator 25 via a feedback loop 24, and then returns it to the adder 27 via the feedback loop 24.

[0025] The second integrator 33 also uses a delay circuit 36 to delay an addition output from an adder 37, supplies this output to a fraction eliminator 35 via a feedback loop 34, and then returns it to the adder 37 via the feedback loop 34.

[0026] Similarly, the third integrator 43 uses a delay circuit 46 to delay an addition output from an adder 47, supplies this output to a fraction eliminator 45 via a feedback loop 44, and then returns it to the adder 47 via the feedback loop 44.

[0027] Likewise, the fourth integrator 50 uses a delay circuit 53 to delay an addition output from an adder 54, supplies

this output to a fraction eliminator 52 via a feedback loop 51, and then returns it to the adder 54 via the feedback loop 51. The fifth integrator 57 has no fraction eliminator. The integrator 57 uses a delay circuit 59 to delay an addition output from an adder 60, and then returns it to the adder 60 via the feedback loop 58.

[0028] The $\Delta\Sigma$ modulator 13 comprises an adder 22, a multiplier 28, and a level adjuster 29. The adder 22 adds multiplication output from the multiplier 12 in FIG. 3 to quantized data fed back from a quantizer 61 to be described later. The quantized data has an inverted sign. The multiplier 28 multiplies an integral output from the first integrator 23 by a first order control factor j_1 supplied from an order control circuit 14. The level adjuster 29 multiplies a multiplication output from the multiplier 28 by an appropriate gain.

[0029] The $\Delta\Sigma$ modulator 13 comprises a multiplier 30 and an adder 32. The multiplier 30 multiplies a multiplication output from the multiplier 12 by a second order control factor j_2 supplied from the order control circuit 14. The adder 32 adds a multiplication output from the multiplier 30, a level adjustment output from the level adjuster 29, and quantized data with an inverted sign supplied from the quantizer 61 to generate an addition output. The adder 32 then supplies this addition output to the second integrator 33.

[0030] The $\Delta\Sigma$ modulator 13 comprises a multiplier 38 and a level adjuster 39. The multiplier 38 multiplies an integral output from the second integrator 33 by a third order control factor j_3 supplied from the order control circuit 14. The level adjuster 39 multiplies a multiplication output from the multiplier 38 by an appropriate gain.

[0031] The $\Delta\Sigma$ modulator 13 comprises a multiplier 40 and an adder 42. The multiplier 40 multiplies a multiplication output from the multiplier 12 by a fourth order control factor j_4 supplied from the order control circuit 14. The adder 42 adds a multiplication output from the multiplier 40, a level adjustment output from the level adjuster 39, and quantized data with an inverted sign supplied from the quantizer 61 to generate an addition output. The adder 42 then supplies this addition output to the third integrator 43.

[0032] The $\Delta\Sigma$ modulator 13 comprises a level adjuster 48 and an adder 49. The level adjuster 48 multiplies an integral output from the third integrator 43 by an appropriate gain. The adder 49 adds a level adjustment output from the level adjuster 48 to quantized data with an inverted sign supplied from the quantizer 61 to generate an addition output. The adder 49 then supplies this addition output to the fourth integrator 50.

[0033] The $\Delta\Sigma$ modulator 13 comprises a level adjuster 55 and an adder 56. The level adjuster 55 multiplies an integral output from the fourth integrator 50 by an appropriate gain. The adder 56 adds a level adjustment output from the level adjuster 55 to quantized data with an inverted sign supplied from the quantizer 61 to generate an addition output. The adder 56 then supplies this addition output to the fifth integrator 57.

[0034] Further, the AS modulator 13 comprises a quantizer 61. The quantizer 61 quantizes an integral output from the fifth integrator 57 to generate quantized data from an output terminal 62. The quantizer 61 also feeds this data back to the adders 22, 32, 42, 49, and 56.

[0035] The following describes basic operations of the $\Delta\Sigma$ modulator 13. An input terminal 21 is supplied with a multi-bit music signal which is output from the multiplier 12. This music signal is supplied to the adder 22 and is added to a feedback signal supplied from the quantizer 61. This feedback signal is quantized data with an inverted sign. As a result, the quantized data is subtracted from the music data. An output from the adder 22 is supplied to the first integrator 23.

[0036] The first integrator 23 has the above-mentioned configuration. The fraction eliminator 25 eliminates a fraction from the data delayed in the delay circuit 26. The feedback loop 24 returns this data to the adder 27. Integration is performed by repeating addition to an adder 22's output supplied to the adder 27. An integral output from the first integrator 23 is supplied to the multiplier 28 and is multiplied by the first order control factor j_1 from the order control circuit 14. The order control circuit 14 outputs the first order control factor j_1 whose initial value is 1.0.

[0037] The music signal is input from the input terminal 21. The multiplier 30 multiplies this music signal by the second order control factor j_2 output from the order control circuit 14. An initial value of this second order control factor j_2 is 0.0. Accordingly, the multiplier 28 provides no operation. The level adjuster 29 multiplies an output from the first integrator 23 by an appropriate gain. The adder 32 then adds the feedback signal to this output and passes it to the second integrator 33.

[0038] The second integrator 33 has the above-mentioned configuration. The fraction eliminator 35 eliminates a fraction from the data delayed in the delay circuit 36. The feedback loop 34 returns this data to the adder 37. Integration is performed by repeating addition to an adder 32's output supplied to the adder 37. An integral output from the second integrator 33 is supplied to the multiplier 38 and is multiplied by the third order control factor j_3 from the order control circuit 14. An initial value of this third order control factor j_3 is 1.0.

[0039] The music signal is input from the input terminal 21. The multiplier 40 multiplies this music signal by the fourth order control factor j_4 output from the order control circuit 14. An initial value of this fourth order control factor j_4 is 0.0. Accordingly, the second integrator 33 operates like the first integrator 23.

[0040] The same processing occurs from the third integrator 43 to the fifth integrator 57. The quantizer 61 quantizes data to 1 bit. This 1-bit data is used as a feedback signal and is reflected on an operation result of the next stage.

[0041] Thus, the 5-order $\Delta\Sigma$ modulator 13 shifts a quantized noise to a high frequency and generates a 1-bit output

signal out of multi-bit input data.

[0042] The following describes how the $\Delta\Sigma$ modulator 13 varies orders. The order control circuit 14 outputs the second order control factor j2 to the multiplier 30. The second order control factor j2 gradually increases from 0.0 and changes to 1.0 within a given time. The first order control factor j1 is expressed as follows.

$$(\text{first order control factor } j1) = 1.0 - (\text{second order control factor } j2)$$

[0043] The first order control factor j1 changes from 1.0 to 0.0 in the same time interval as for the second order control factor j2. When the first order control factor j1 becomes 0.0, this means that a feedback signal set to 0 enters the first integrator 23 and the first stage.

[0044] Since the second order control factor j2 is 1.0, this means that a music signal is directly input to the second integrator 33 via the adder 32. According to these operations, the $\Delta\Sigma$ modulator 13 seamlessly shifts from the fifth to the fourth order and finally becomes the complete fourth $\Delta\Sigma$ modulator.

[0045] In exactly the same way, it is possible to seamlessly change the $\Delta\Sigma$ modulator 13 to the third order by controlling the third order control factor j2 and the fourth order control factor j4. It is also possible to change from the fifth, the fourth, then to the third order, alternatively, from the fifth to the third order.

[0046] The following describes operations of the 1-bit data editing unit 10 in detail with reference back to FIG. 3. In FIG. 3, like the prior art, a 1-bit data D1i is input to the input terminal 11 as an original sound signal. The multiplier 12 multiplies the input 1-bit data D1i by a factor k (any value) to generate a multi-bit multiplication output with an adjusted sound volume. The $\Delta\Sigma$ modulator 13 receives this output and converts it to 1-bit data to generate the $\Delta\Sigma$ modulation signal D1'.

[0047] At this time, the selector 16 is set to the $\Delta\Sigma$ modulation signal D1' side b. When 1-bit data is output, the $\Delta\Sigma$ modulation signal D1' is output. When the factor k becomes 1.0, the multi-bit multiplication output may be assigned a weight 1. In this case, all bits below the weight 1 are reset to 0s. The $\Delta\Sigma$ modulator 13 is not provided with data smaller than or equal to 1 (hereafter referred to as the fraction).

[0048] Detecting that the factor k becomes 1.0, the control unit 18 issues an instruction to the order control circuit 14 for lowering the order. By receiving this instruction, the order control circuit 14 controls the first order control factor j1 through the fourth order control factor j4 for lowering the order from the fifth to the fourth or to the third as mentioned above.

[0049] When the $\Delta\Sigma$ modulator 13 finishes shifting to the lower order, the control unit 18 issues an instruction for eliminating the fraction to the fraction eliminator 15. The fraction eliminator 15 comprises the fraction eliminators 25, 35, 45, and 52 each connected to the integrators. The fraction eliminator 15 eliminates a fraction remaining in each integrator by adding or subtracting a slight amount of DC.

[0050] When the fraction has been removed, the control unit 18 compares the $\Delta\Sigma$ modulation signal D1' with the delayed original sound signal D1i. When the output patterns match within an appropriate range, the control unit 18 switches the selector 16 over to the delayed original sound signal D1i side a.

[0051] The $\Delta\Sigma$ modulator 13 switches the $\Delta\Sigma$ modulation signal over to the original sound signal when the order becomes low enough to cause small level differences and phase rotations at the high frequency. The changeover should be available without generating a noise even if the original sound signal contains a high-frequency signal exceeding the audible band. At this time, the changeover time just takes several tens of milliseconds. A low S/N ratio causes no significant problem while the low order take effect.

[0052] A series of operations described above applies when an output $\Delta\Sigma$ modulation signal is used for volume adjustment or the like, then no adjustment or the like becomes unnecessary, and finally the output signal is switched to the original sound signal. When the adjustment or the like is needed again, the following operations apply.

[0053] While the factor k is 1.0, the AS modulator 13 keeps operating with the third order unchanged. Specifically, the order control circuit 14 uses the second order control factor j2 set to 1.0, the first order control factor j1 set to 0.0, the fourth order control factor j4 set to 1.0, and the third order control factor j3 set to 0.0.

[0054] Just before the factor k changes from 1.0 to a different value, the control unit 18 compares the delayed original sound signal D1d with the $\Delta\Sigma$ modulation signal D1'. When the output patterns match within an appropriate range, the control unit 18 switches the selector 16 over to the $\Delta\Sigma$ modulation signal 1' side b. At this time, the $\Delta\Sigma$ modulator 13 is set to the third order. No noise occurs even if the original sound signal contains a high-frequency component. An output is switched over to the $\Delta\Sigma$ modulation signal 1'.

[0055] When detecting that the selector 16 is switched, the order control circuit 14 smoothly changes the third order control factor j3 from 0.0 to 1.0. Concurrently, the order control circuit 14 changes the fourth order control factor j4 from 1.0 to 0.0. Since the second order control factor j2 is set to 1.0, the $\Delta\Sigma$ modulator 13 changes to the fourth order.

[0056] When this operation is complete, the second order control factor j2 smoothly changes to 0.0. The first order control factor j1 smoothly changes to 1.0. The $\Delta\Sigma$ modulator 13 changes to the fifth order. Consequently, subsequent

outputs become fifth $\Delta\Sigma$ modulation outputs, ensuring a sufficient S/N ratio.

[0057] As mentioned above, the $\Delta\Sigma$ modulator 13 can smoothly change orders from the fifth to the third. Using this, the 1-bit data editing unit 10 ensures the S/N ratio by maintaining the fifth order when a $\Delta\Sigma$ modulation signal is output for a long period. When an output is switched to the original sound signal, the 1-bit data editing unit 10 decreases a switching noise due to a level difference and a phase rotation by dropping the order to the third just before the switchover.

[0058] Though the above example uses the fifth $\Delta\Sigma$ modulator as a basis, it may be the fourth, sixth, or seventh order. The $\Delta\Sigma$ modulator may be dropped down to the second or the first as needed. In the above-mentioned operation description, the factor k is set to 1.0 or another value. When the factor k is set to 0.0, the order is decreased likewise. Then, the $\Delta\Sigma$ modulation signal is switched to a fixed-pattern signal representing no sound. If input/output frequency characteristics satisfy intended conditions, the order control circuit 14 may output the second order control factor j_2 and the fourth order control factor j_4 always fixed to 1.0.

[0059] The integrator is configured as $Z^{-1}/(1-Z^{-1})$. If input/output frequency characteristics satisfy intended conditions, the configuration may be $1/(1-Z^{-1})$. The multipliers 28 and 38 may be unified. The immediately subsequent level adjusters 29 and 39 may be also unified.

[0060] The $\Delta\Sigma$ modulator and input/output signals may comprise not only one bit, but also a plurality of bits.

Claims

1. A digital signal processing device comprising:

multiplication means (12) for multiplying an input $\Delta\Sigma$ modulation signal generated from $\Delta\Sigma$ modulation by a factor;

$\Delta\Sigma$ modulation means (13) having a plurality of integrators for varying effective orders and applying $\Delta\Sigma$ modulation again to an output from said multiplication means (18); and

switchover means (16) for switching between a reprocessed $\Delta\Sigma$ modulation signal from said $\Delta\Sigma$ modulation means (13) and said input $\Delta\Sigma$ modulation signal.

2. The digital signal processing device according to claim 1, wherein said $\Delta\Sigma$ modulation means (13) comprises order control means (14) for varying effective orders depending on signal switchover situations in said switchover means (16).

3. The digital signal processing device according to claim 2, wherein said order control means (14) varies effective orders for said $\Delta\Sigma$ modulation means (13) at an approximate timing when said switchover means (16) switches between said input $\Delta\Sigma$ modulation signal and said reprocessed $\Delta\Sigma$ modulation signal.

4. The digital signal processing device according to claim 2, wherein said order control means (14) varies effective orders for said $\Delta\Sigma$ modulation means (13) at an approximate timing when said switchover means (16) switches between a fixed signal changing to no sound in an audible band and music data processed with $\Delta\Sigma$ modulation.

5. The digital signal processing device according to claim 1, wherein said $\Delta\Sigma$ modulation means (13) comprises fraction elimination means (15) for eliminating a fraction remaining in said integrator.

6. A digital signal processing method, comprising steps of:

a multiplication step for multiplying an input $\Delta\Sigma$ modulation signal generated from $\Delta\Sigma$ modulation by a specified factor for specified processing;

a reprocessed $\Delta\Sigma$ modulation step for reapplying $\Delta\Sigma$ modulation to an output provided with said specified processing by using a $\Delta\Sigma$ modulator comprising a plurality of integrators for varying effective orders; and

a switchover step for switching between said input $\Delta\Sigma$ modulation signal and said reprocessed $\Delta\Sigma$ modulation signal.

7. The digital signal processing method according to claim 6, wherein said reprocessed $\Delta\Sigma$ modulation step varies effective orders for said $\Delta\Sigma$ modulator depending on signal switchover situations in said switchover step.

8. The digital signal processing method according to claim 7, wherein said reprocessed $\Delta\Sigma$ modulation step varies effective orders for said AS modulator at an approximate timing when said switchover step switches between said input $\Delta\Sigma$ modulation signal and said reprocessed $\Delta\Sigma$ modulation signal.

9. The digital signal processing method according to claim 7, wherein said reprocessed $\Delta\Sigma$ modulation step varies effective orders for said $\Delta\Sigma$ modulator at an approximate timing when said switchover step switches between a fixed signal changing to no sound in an audible band and music data processed with $\Delta\Sigma$ modulation.
- 5 10. The digital signal processing method according to claim 6, wherein said reprocessed $\Delta\Sigma$ modulation step not only varies effective orders for a $\Delta\Sigma$ modulator, but also eliminates a fraction remaining in said integrator.
11. A $\Delta\Sigma$ modulator for applying $\Delta\Sigma$ modulation to a multi-bit signal comprising:
10 a plurality of integrators (23, 33, 43, 50, 57); and
order variation means (14) for varying effective orders increasing due to connection with a plurality of said integrators (23, 33, 43, 50, 57).
12. The $\Delta\Sigma$ modulator according to claim 11, wherein the fraction elimination means (25, 35, 45, 52) for eliminating a
15 fraction remaining in said integrator (23, 33, 43, 50);.

20

25

30

35

40

45

50

55

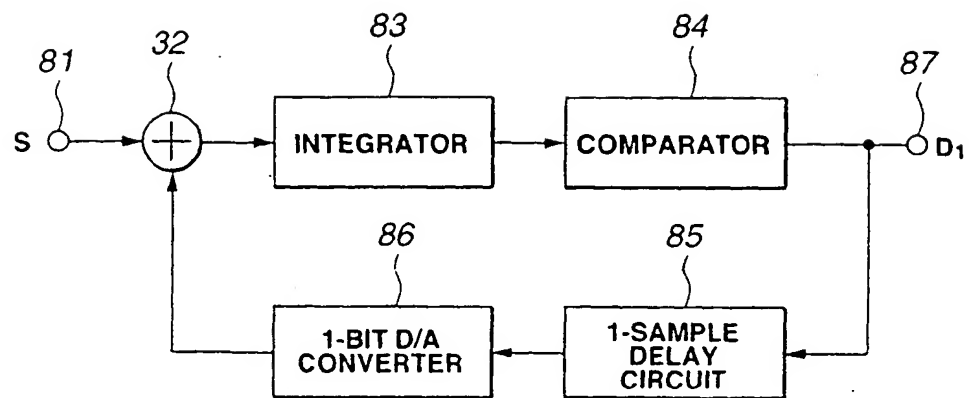


FIG.1

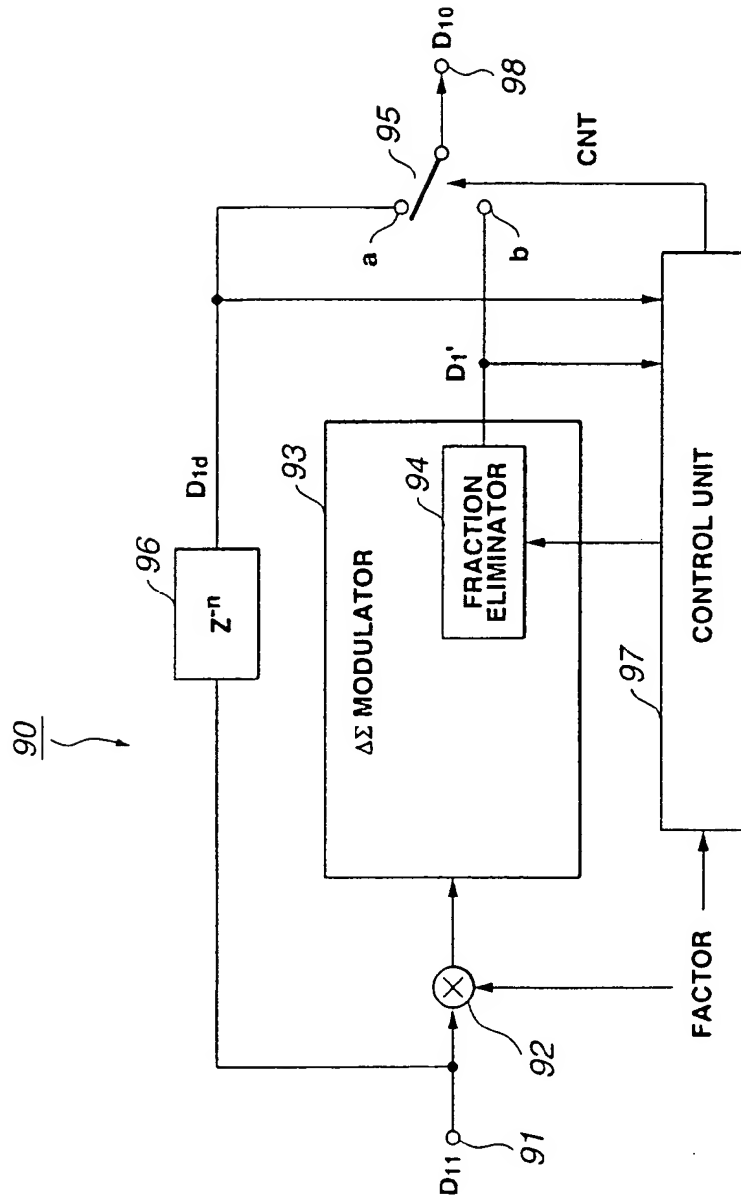


FIG.2

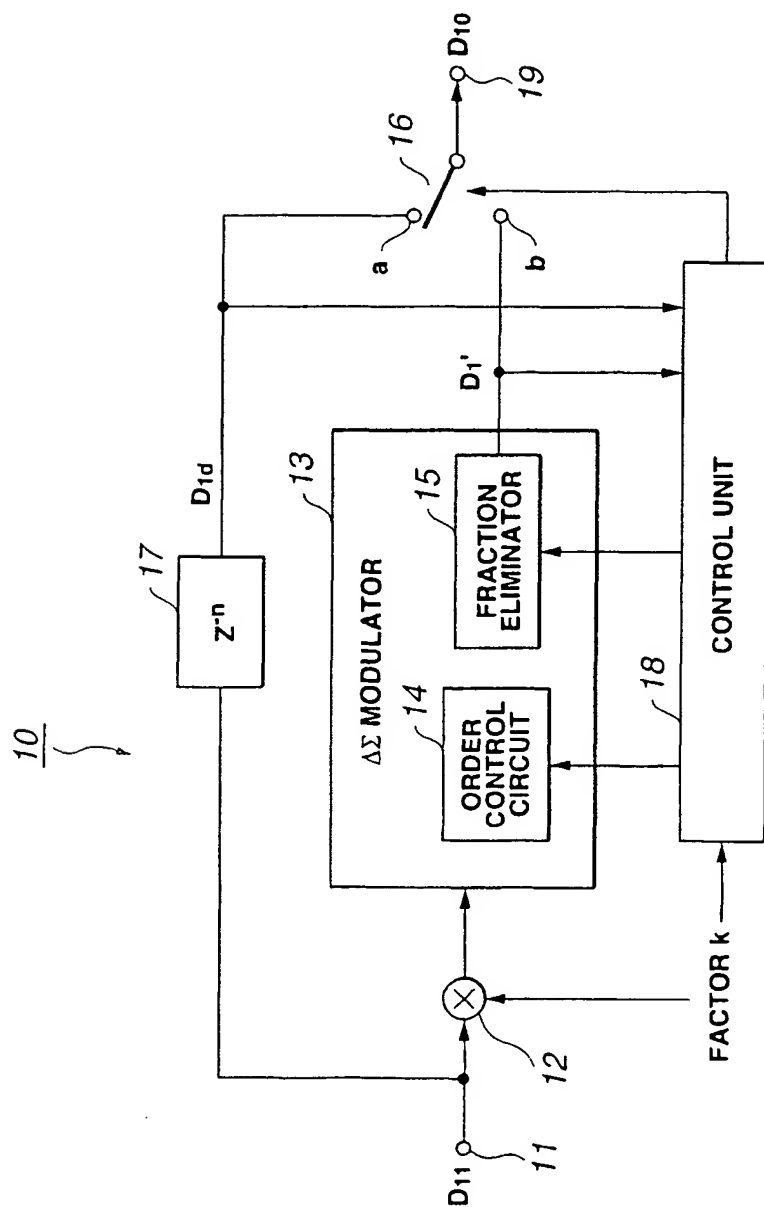


FIG. 3

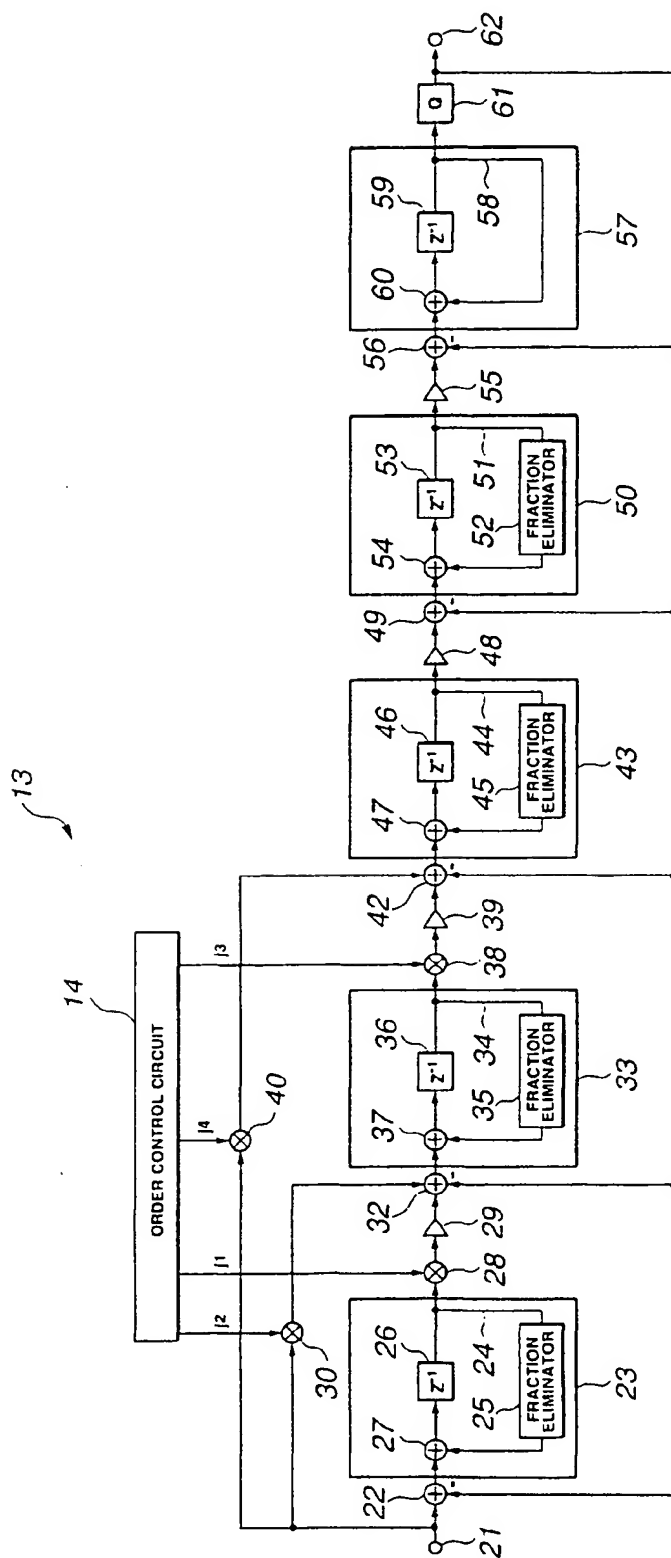


FIG.4

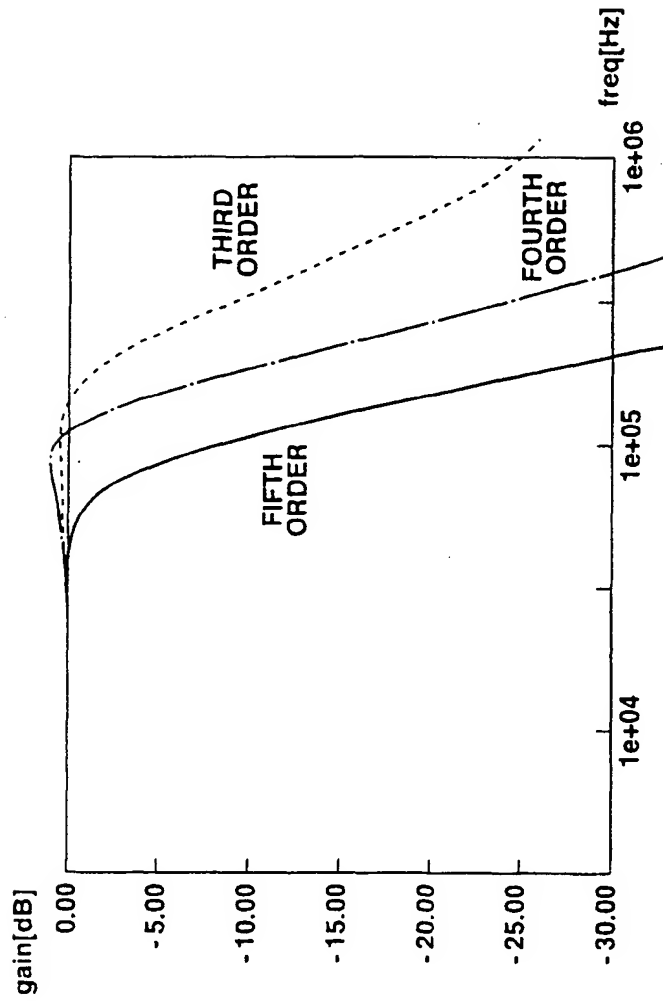


FIG.5



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
01.10.2003 Bulletin 2003/40

(51) Int Cl.7: **H03M 3/02, H03M 7/30**

(43) Date of publication A2:
05.09.2001 Bulletin 2001/36

(21) Application number: 01400412.1

(22) Date of filing: 16.02.2001

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Tagami, Shigeo, c/o Sony Corporation
Shinagawa-ku, Tokyo (JP)

(74) Representative: Thévenet, Jean-Bruno et al
Cabinet Beau de Loménie
158, rue de l'Université
75340 Paris Cédex 07 (FR)

(30) Priority: 18.02.2000 JP 2000046838

(71) Applicant: **SONY CORPORATION**
Tokyo (JP)

(54) **A digital signal processing device and a method and a delta-sigma modulator using the same method**

(57) A signal processing device uses a $\Delta\Sigma$ modulator (13) having varying effective orders to ensure an S/N ratio by selecting a high order when a 1-bit music signal is output via the $\Delta\Sigma$ modulator (13). The signal processing device prevents a noise during switchover by shifting to a low order just before the $\Delta\Sigma$ modulator

(13) is bypassed if this occurs. The present invention provides a digital signal processing device which can switch between an original sound signal and a $\Delta\Sigma$ modulation signal, and yield a sufficient S/N ratio for a re-processed $\Delta\Sigma$ modulation signal. If any 1-bit original sound signal is input, little switching noise is generated.

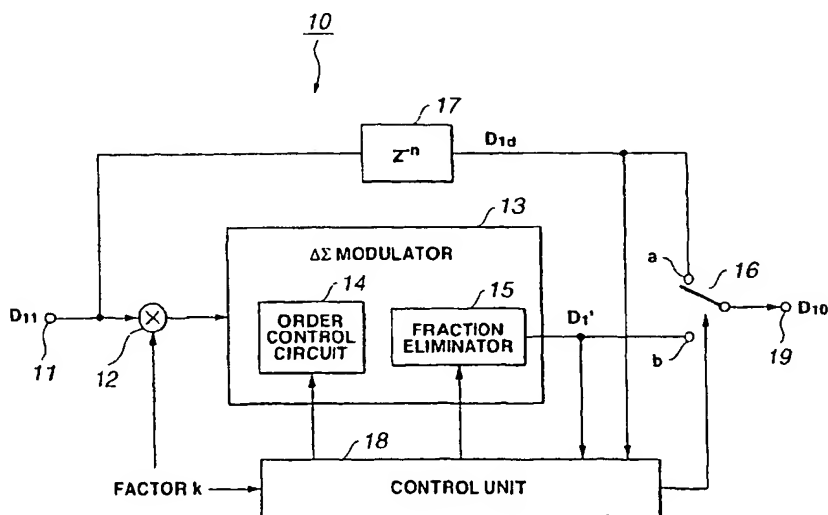


FIG.3

EP 1 130 786 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 40 0412

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 757 301 A (KUO TAI-HAUR ET AL) 26 May 1998 (1998-05-26)	11	H03M3/02 H03M7/30
Y	* column 1 - column 7; figure 2 *	1-10,12	

D,Y	EP 0 783 207 A (SONY CORP) 9 July 1997 (1997-07-09)	1-10,12	
	* column 4 - column 8; figures 4,5 *		

X	EP 0 512 687 A (NOKIA MOBILE PHONES LTD ;FJNCITEC OY (FI)) 11 November 1992 (1992-11-11)	11	
Y	* column 1 - column 6; figures 3,4 *	1-10,12	

X	US 5 742 246 A (CHEN JHY-RONG ET AL) 21 April 1998 (1998-04-21)	11	
Y	* column 1 - column 7; figure 2 *	1-10,12	

A	US 5 012 244 A (WELLARD DAVID R ET AL) 30 April 1991 (1991-04-30)	1-12	
	* column 1 - column 3; figures 1,2 *		

			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H03M
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 5 August 2003	Examiner Morrish, I
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons B : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 42 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 40 0412

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-08-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5757301	A	26-05-1998	NONE	
EP 0783207	A	09-07-1997	JP 3318823 B2	26-08-2002
			JP 9307452 A	28-11-1997
			AU 709109 B2	19-08-1999
			AU 7640796 A	03-07-1997
			CN 1171661 A ,B	28-01-1998
			EP 0783207 A2	09-07-1997
			US 5793316 A	11-08-1998
EP 0512687	A	11-11-1992	FI 911694 A	10-10-1992
			DE 69214996 D1	12-12-1996
			DE 69214996 T2	10-04-1997
			EP 0512687 A2	11-11-1992
			JP 3142946 B2	07-03-2001
			JP 5110442 A	30-04-1993
			US 5248972 A	28-09-1993
US 5742246	A	21-04-1998	NONE	
US 5012244	A	30-04-1991	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82